


# TestkingPass



**Try Before You Buy**

Download a free sample of any of our exam questions and answers


- ✓ 24/7 customer support, Secure shopping site
- ✓ Free One year updates to match real exam scenarios
- ✓ If you failed your exam after buying our products we will refund the full amount back to you.

Select a vendor...

Select an exam...

Your email address

[Free Download](#)

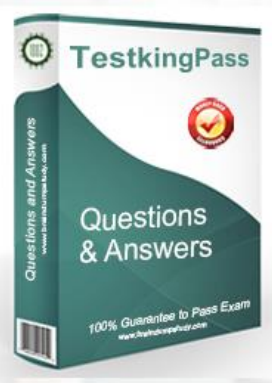

 HAPPY CUSTOMERS 51892	 DOWNLOADS 68912	 TEAM MEMBERS 56892	 SHARES 75162
---	---	--	--



<http://www.testkingpass.com>

Reliable test dumps & stable pass king & valid test questions

**Exam :** HP3-029

**Title :** HP LaserJet 1150/1300 series  
Datasheet

**Vendors :** HP

**Version :** DEMO

NO.1 What must be done to run paper through the printer with the covers off.?

- A. Remove the left-side cover and depress the engine-test switch. A single test page prints.
- B. Remove the right-side cover and depress the engine-test switch. A single test page prints.
- C. Remove the left-side cover and depress the engine-test switch during the power-on cycle. A single test page prints.
- D. The printer does not allow you to run paper through the paper path with the covers off.

Answer: A

NO.2 Approximately how many pages does the high-capacity toner cartridge print on the HP LaserJet 1300 series printer?

- A. 3000
- B. 2500
- C. 4000
- D. 1300

Answer: C

NO.3 Approximately how many pages does the standard toner cartridge print on the HP LaserJet 1300 series printer?

- A. 1500
- B. 1000
- C. 2500
- D. 3000

Answer: C